



## SL185008-A

### Cylindrical roller bearing

Schaeffler Kimliği:  
0002670740000

Cylindrical roller bearing SL1850..-A, full complement roller set, two-row, semi-locating bearing, 1 rib on outer ring, 3 ribs on inner ring, type SL18

### Teknik bilgiler

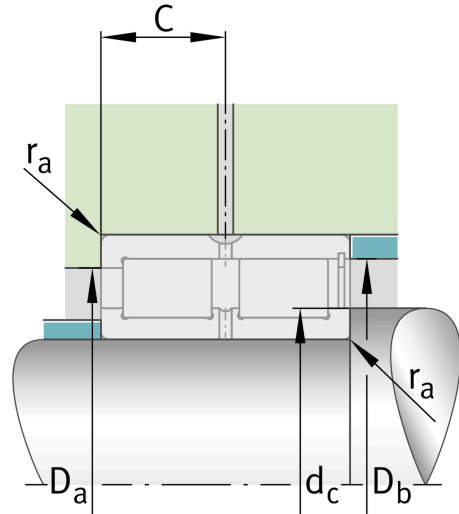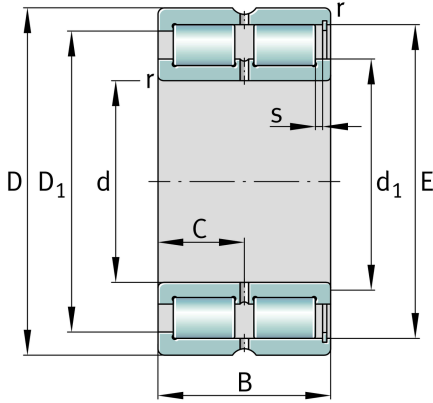

### Dimensions

$r_{\min}$	1 mm	Minimum chamfer dimension
$r_{1 \min}$	1,5 mm	Minimum chamfer dimension
s	1,5 mm	Axial displacement
C	19 mm	Distance to lubrication hole
$d_1$	50,5 mm	Maximum rib diameter inner ring
$D_{1 \min}$	57,1 mm	Minimum rib diameter outer ring
E	61,74 mm	Raceway diameter outer ring
	0,536 kg	Ağırlık

### Main Dimensions & Performance Data

d	40 mm	Bore diameter
D	68 mm	Outside diameter
B	38 mm	Width
$C_r$	100.000 N	Basic dynamic load rating, radial
$C_{0r}$	133.000 N	Basic static load rating, radial
$C_{ur}$	18.400 N	Fatigue load limit, radial
$n_G$	6.300 1/min	Limiting speed
$n_{gr}$	4.200 1/min	Reference speed

### Mounting dimensions

$d_{c \min}$	50,5 mm	Minimum shaft shoulder
$d_{a \min}$	50,5 mm	Minimum diameter shaft shoulder
$D_{a \max}$	57,1 mm	Maximum diameter of housing shoulder
$r_{a \max}$	1 mm	Maximum recess radius
$r_{a1 \max}$	1,5 mm	Maximum recess radius
$D_{e \min}$	57,1 mm	Minimum diameter of housing shoulder

### Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	120 °C	Operating temperature max.