


SL181856-E

Cylindrical roller bearing

Schaeffler Kimliği:
0153822810000

Cylindrical roller bearing SL1818..-E, full complement roller set, single row, semi-locating bearing, 1 rib on outer ring, 2 ribs on inner ring, type SL18

Teknik bilgiler

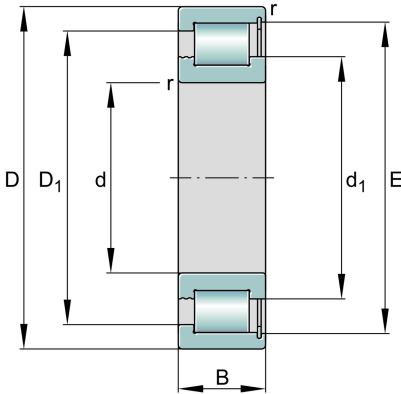


Dimensions

r_{min}	2 mm	Minimum chamfer dimension
s	2,5 mm	Axial displacement
d_1	304 mm	Maximum rib diameter inner ring
D_{1min}	327 mm	Minimum rib diameter outer ring
E	335 mm	Raceway diameter outer ring
	6,711 kg	Ağırlık


Main Dimensions & Performance Data

d	280 mm	Bore diameter
D	350 mm	Outside diameter
B	33 mm	Width
C_r	355.000 N	Basic dynamic load rating, radial
C_{0r}	670.000 N	Basic static load rating, radial
C_{ur}	74.000 N	Fatigue load limit, radial
n_G	990 1/min	Limiting speed
n_{gr}	730 1/min	Reference speed

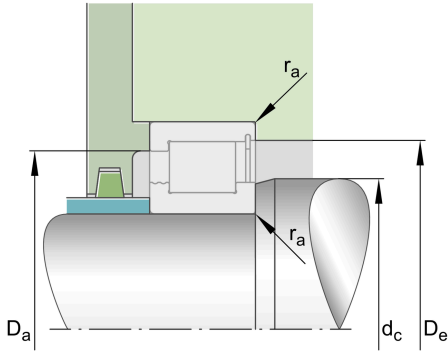

Mounting dimensions

d_{amin}	304 mm	Minimum diameter shaft shoulder
d_{cmin}	304 mm	Minimum shaft shoulder
D_{amax}	327 mm	Maximum diameter of housing shoulder
D_{emin}	335 mm	Minimum diameter of housing shoulder
r_{amax}	2 mm	Maximum recess radius

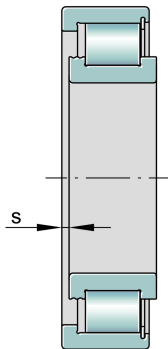

Temperature range

T_{min}	-30 °C	Operating temperature min.
T_{max}	120 °C	Operating temperature max.