


SL181860-E

Cylindrical roller bearing

Schaeffler Kimliği:
0153807770000

Cylindrical roller bearing SL1818.-E, full complement roller set, single row, semi-locating bearing, 1 rib on outer ring, 2 ribs on inner ring, type SL18

Teknik bilgiler

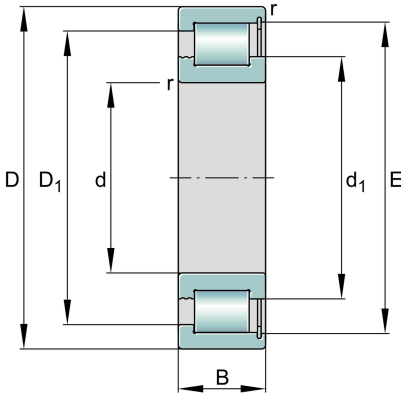

Dimensions

r_{\min}	2,1 mm	Minimum chamfer dimension
s	3 mm	Axial displacement
d_1	323,5 mm	Maximum rib diameter inner ring
$D_{1\min}$	350,5 mm	Minimum rib diameter outer ring
E	360 mm	Raceway diameter outer ring
	9,484 kg	Ağırlık

Main Dimensions & Performance Data

d	300 mm	Bore diameter
D	380 mm	Outside diameter
B	38 mm	Width
C_r	455.000 N	Basic dynamic load rating, radial
C_{0r}	840.000 N	Basic static load rating, radial
C_{ur}	91.000 N	Fatigue load limit, radial
n_G	920 1/min	Limiting speed
n_{gr}	680 1/min	Reference speed

Mounting dimensions

$d_{a\min}$	323,5 mm	Minimum diameter shaft shoulder
$d_{c\min}$	323,5 mm	Minimum shaft shoulder
$D_{a\max}$	350,5 mm	Maximum diameter of housing shoulder
$D_{e\min}$	360 mm	Minimum diameter of housing shoulder
$r_{a\max}$	2,1 mm	Maximum recess radius

Temperature range

T_{\min}	-30 °C	Operating temperature min.
T_{\max}	120 °C	Operating temperature max.

